




TeamItalia®

Lighting

2026 LIGHTING UPDATE

La luce che evolve: estetica,
comfort visivo e tecnologia

NEW

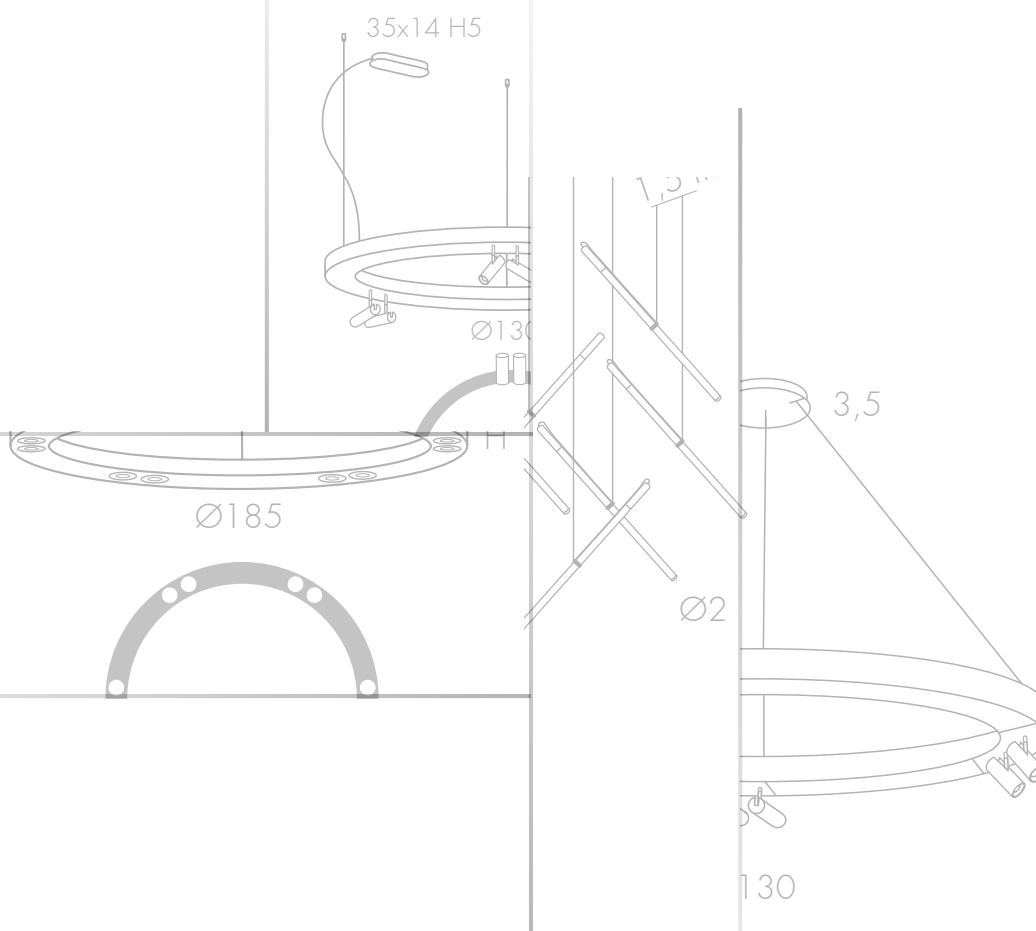



NEWS 2026

INDICE


Bellai up spot micro.....	5
Bellai up spot incasso.....	7
Bellai up spot 8x8.....	9
Ogis plafone / Incasso / parete.....	11
Overlap sospensione verticale.....	13
Overlap verticale parete.....	15
Simply Evo outdoor.....	17
Tubico composizione.....	19
Tubico orientabile.....	21
Alter.....	23
Dot terra 24V.....	25
Dot simmetrico e asimmetrico terra.....	27
Focus round.....	29
Liff parete outdoor.....	31
Magik plafone / parete.....	33
Shopen.....	35
Spot outdoor.....	37
Surface.....	39
B48 Minim.....	41
B48 Mycron.....	50

BELLAI UP SPOT MICRO






BELLAI UP SPOT MICRO

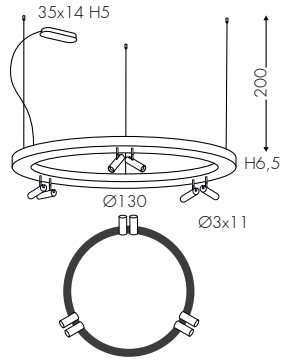

1123COF
1123CDM

OnOff - 115W 13000lm + 18W 2160lm - 220V
Dali(Push) 115W 13000lm + 18W 2160lm - 220V

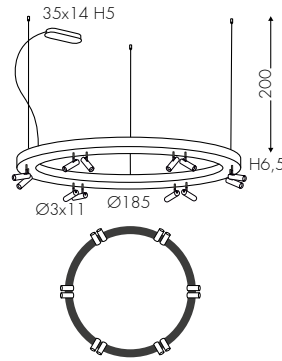

1123DOF
1123DDM

OnOff - 145W 16000lm + 36W 4320lm - 220V
Dali(Push) 145W 16000lm + 36W 4320lm - 220V



A E28 Satin - Frosted - Satinert

B 3000K
C 4000K


BV NE
[White square] [Black square]

BELLAI UP SPOT INCASSO






BELLAI UP SPOT INCASSO

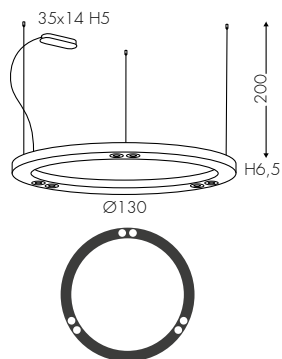

1123DOF
1123DDM

OnOff 115W 13000lm + 12W 1680lm - 220V
Dali(Push) 115W 13000lm + 12W 1680lm - 220V

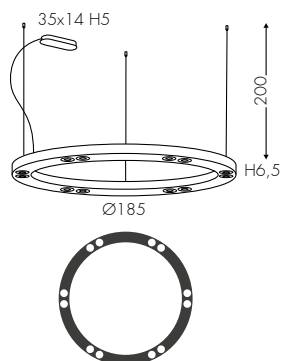

1123DOF
1123DDM

OnOff 145W 16000lm + 24W 3360lm - 220V
Dali(Push) 145W 16000lm + 24W 3360lm - 220V



A **E28** Satin - Frosted - Satinert

A 2700K

B 3000K **C** 4000K

BV **NE**




BELLAI UP SPOT 8X8






BELLAI UP SPOT




1142BOF
1142BDM

OnOff 65W 6080lm+14W 2400lm + 6x7W 680lm - 220V
DALI(Push) 65W 6080lm+14W 2400lm+6 x 7W 680lm - 220V



1142COF
1142CDM

OnOff 92W 8650lm+24W 3600lm+6x7W 680lm - 220V
DALI (Push) 92W 8650lm+24W 3600lm+6x7W 680lm - 220V



1142DOF
1142DDM

OnOff 160W 15200lm+52W 7200lm+8x7W 680lm - 220V
DALI (Push) 160W 15200lm+52W 7200lm+6x7W 680lm - 220V



E2 Opale - Opale - Opal
E19 Darklight

A 2700K
B 3000K **C** 4000K


BV **NE**

OGIS PLAFONE / INCASSO





OGIS INCASSO




4082BTF

OnOff - 6W 2x420lm - 220V



OGIS PARETE




2082ATF

Triac 6,5W 800lm - 220V



OGIS PLAFONE



3082ATF

Triac 6,5W 800lm - 220V



A E2 Opale - Opale - Opal

● A 2700K
● B 3000K


BV NE

OVERLAP VERTICALE






OVERLAP VERTICALE




9015FTF

Rosone 4x Circolare (1x Driver 200W 24VDC)



9015GTF

Rosone 6x Circolare (2x Driver 200W 24VDC)



9015HTF

Rosone 12x Circolare (3x Driver 200W 24VDC)




A

BV NE




1015K

11W 950lm - 24VDC



1015Z

22W 1890lm - 24VDC



1015Y

28W 2350lm - 24VDC



1015Y

47W 3800lm - 24VDC



E2 Opale - Opale - Opal

A 2700K
B 3000K

BV NE




OVERLAP VERTICALE PARETE





OVERLAP VERTICALE PARETE



2015BOF
2015BDM

OnOff 22W 1400lm - 220V

Dali (Push) 22W 1400lm - 220V



2015COF
2015CDM

OnOff 33W 2100lm - 220V

Dali (PUSH) 33W 2100lm - 220V



E2 Opale - Opale - Opal

A 2700K

B 3000K


BV **NE**



SIMPLY EVO OUTDOOR




SIMPLY EVO OUTDOOR



2019QOF

OnOff - 2x3W 2x210lm - 220V



2015ROF

OnOff - 2x6W 2x420lm - 220V



E28 Satin - Frosted - Satinert



B 3000K

BV AN




TUBICO COMPOSIZIONE





TUBICO COMPOSIZIONE



1069U^{TF}

(Triac) 6x3W 6x350lm - 220V



E19 Darklight

E8 Trasparente - Transparent

● **A** 2700K


● **B** 3000K



TUBICO ORIENTABILE 30/60cm.




TUBICO ORIENTABILE




4069VOF

OnOff - 3W 350lm - 220V

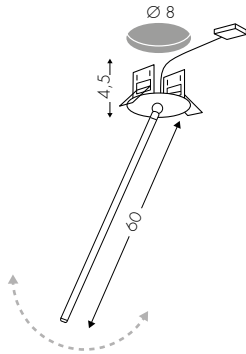

4069ZOF

OnOff - 3W 350lm - 220V

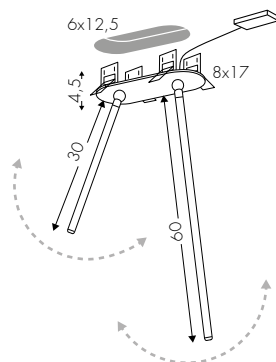

4069VZOF

OnOff - 2x3W 2x350lm - 220V



E19 Darklight
E8 Trasparente - Transparent

A 2700K
B 3000K



ALTER Ø H20/60/90cm.





ALTER 20cm.




5157A

20W 2000lm - 220VAC



ALTER 60cm.




5157B

20W 2000lm - 220VAC



ALTER 90cm.



4082BTF

OnOff - 2x6W 2x420lm - 220V



E8 Trasparente
Transparent - Transparent

A 2700K
B 3000K


AN

DOTUPLIGHT 24V






DOT UPLIGHT Ø 4,3 cm



4042A24

1W 120lm - 24VDC




9042A24

Controcassa per 4042A24




DOT UPLIGHT Ø 5,9 cm



4042B24

3W 360lm - 24VDC




9042B24

Controcassa per 4042B24



DOT UPLIGHT Ø 6,9 cm

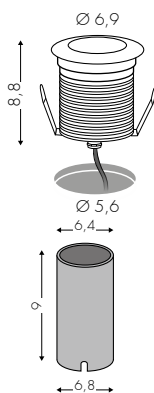

4042C24

7W 840lm - 24VDC



9042C24

Controcassa per 4042C24



24° Ottica
Optic - Optik

● A 2700K
● B 3000K


AL

DOT SIMMETRICO / ASIMMETRICO






DOT ASIMMETRICO



4042D24

3W 78lm - 24VDC



94042D24

Controcassa per 4042A24




24° Ottica
Optic - Optik

B 3000K

AL




DOT SIMMETRICO



4042E24

3W 360lm - 24VDC



9042B

Controcassa per 4042E24



24° Ottica
Optic - Optik

B 3000K

AL




FOCUS ROUND





FOCUS ROUND



4095F

7W 800lm - max.700mA - 10VDC




36° Ottica
Optic - Optik

● B 3000K
○ C 4000K

BV NE
□ ■



FOCUS ROUND DOPPIO GU10



4095G

2xGU10 max 10W LED - 220V (lampadina non inclusa)




GU10

Sorgente GU10 non inclusa - GU10 light source not included - GU10 Lichtquelle nicht enthalten

BV NE
□ ■



FOCUS ROUND DOPPIO



409BOF

409BDM

4095BTF

OnOff 2x9W 2x1100lm - 220V

Dali (Push) 2x9W 2x1100lm - 220V

TRIAC 2x9W 2x1100lm - 220V

409COF

409CDM

4095CTF

OnOff 2x12W 2x1400lm - 220V

Dali (Push) 2x12W 2x1400lm - 220V

TRIAC 2x12W 2x1400lm - 220V



24° Ottica - Optic - Optik
36° Ottica - Optic - Optik

● A 2700K
● B 3000K ○ C 4000K


BV NE
□ ■

LIFE OUTDOOR





LIFF PARETE



2018E48

18W 1700lm - 48V



E28 Satin - Frosted - Satinert



B 3000K




MAGIK PLAFONE / PARETE





MAGIK PLAFONE



3156ATF

Triac - 6W 580lm - 220V




90° Ottica
Optic - Optik

B 3000K

AN



MAGIK PARETE DOWNLIGHT



2156AOF

OnOff - 6W 580lm - 220V




90° Ottica
Optic - Optik

B 3000K

AN



MAGIK PARETE UPDOWNLIGHT



21562OF

OnOff - 2x6W 580lm - 220V



90° Ottica
Optic - Optik

B 3000K


AN

SHOPEN





SHOPEN 1x30W



4141AOF
4141ADM

OnOff - 30W 2700lm - 220V
DALI (Push) - 30W 2700lm - 220V




38° Ottica
Optic - Optik

B 3000K
C 4000K

BV **NE**



SHOPEN 2x30W



4141BOF
4141BDM

OnOff - 2x30W 2x2700lm - 220V
DALI (Push) - 2x30W 2x2700lm - 220V



38° Ottica
Optic - Optik

B 3000K
C 4000K


BV **NE**

SPOT OUTDOOR





SPOT OUTDOOR



3018YOF

OnOff - 15W 1300lm - 220V



36° Ottica
Optic - Optik



B 3000K


BV NE
 

SURFACE






SURFACE



2107B

15W 1400lm - 24VDC

ONLY
3K



2107C

30W 2800lm - 24VDC



AM2107C

Prolunga stagna M/F 2 mt.




10° Ottica
Optic - Optik

● B 3000K
○ C 4000K


GV

B48 MINIM



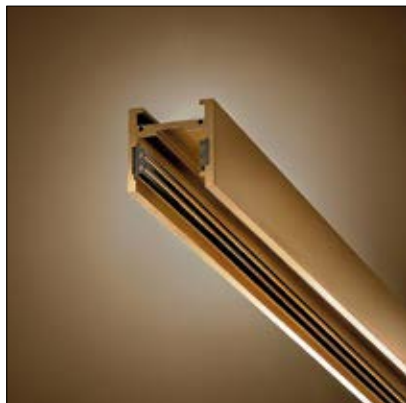

B48 MINIM plafone/sospensione



9117A48

Track MiniM plafone/sospensione 48V DC 2mt
Ceiling/suspension MiniM Track 48V DC 2mt
Schienendeckenaufhängung MiniM 48V DC 2mt

9117A148


Track MiniM plafone/sospensione 48V DC 1mt
Ceiling/suspension MiniM Track 48V DC 1mt
Schienendeckenaufhängung MiniM 48V DC 1mt



BV NE



B48 MINIM plafone/sospensione curvo



9117R48

Track MiniM plafone/sospensione curvo 48V DC r46
Curved MiniM track R46 48V DC ceiling/suspension
Gekrümmte MiniM Schiene R46
48V DC Decken-/Hängeleuchte




BV NE




ACCESSORIES

B48 MINIM Accessori




9117C48

Track giunto angolare "L" 48V DC
Track angular junction "L" 48V DC
Track Eckverbindung "L" 48V DC




9117D48

Track giunto angolare "T" 48V DC
Track angular junction "T" 48V DC
Track Eckverbindung "T" 48V DC




9117E48

Track giunto angolare "L Vert" 48V DC
Track angular junction "L Vert" 48V DC
Track Eckverbindung "L Vert" 48V DC



9117P48

Giunto elettro meccanico lineare
Linear electromechanical joint
Lineares elektromechanisches Gelenk



9117Z48

Kit connettore - NO DRIVER
Connector kit - NO DRIVER
Steckerbausatz - NO DRIVER


**DRIVER
NOT INCLUDED**



BV NE
□ ■




B48 MINIM Accessori




9074F48

Coppia accessori sospensione
Couple of accessories suspension
Paar Zubehör Aufhängung




9117B48

Coppia di testate
Couple Endcaps - Paar Endkappen



⊕ **9074FS48**
⊗ **9074FS548**

B48 Kit Rosone SMALL+2mt Cavo TRASP.
B48 Rosette Kit SMALL+2mt TRASP. cable
B48 Kit Rosette SMALL+2mt Kabel TRASP.



9074FB48

B48 Kit Rosone BIG+2mt Cavo 3Poli TRASP.
B48 Rosette Kit BIG+2mt 3Poles TRASP. cable.
B48 Kit Rosette BIG+2mt Kabel 3Poles TRASP.

**DRIVER
NOT INCLUDED**

⚡ Alimentatore non incluso - Power Supply not included - Netzteile nicht enthalten

BV NE
□ ■




B48 MINIM Drivers Kit



KIT SOLA CONNESSIONE (NO DRIVER)

Connection kit only (no driver - Nur anschlusssatz (kein treiber



9117Z48


Kit connettore - NO DRIVER
Connector kit - NO DRIVER
Steckerbausatz - NO DRIVER

**DRIVER
NOT INCLUDED**



Alimentatore non incluso - Power Supply not included - Netzteile nicht enthalten

BV NE
□ ■



ALIMENTATORI ON/OFF INTEGRATI

Integrated ON/OFF power supplies
Integrierte ON/OFF-Stromversorgungen

9074R

Driver 100W 48V DC


9074S

Driver 200W 48V DC



Alimentatore Incorporato - Incorporated Power Supply - Eingebautes Netzteil

BV NE
□ ■



KIT di Alimentazione ON/OFF

KIT ON/OFF Driver - KIT ON/OFF Netzteil

9117GB48

Kit driver outside 150W - 48V DC
+ connettore **ON/OFF**

Driver kit outside 150W 48VDC
+ **ON/OFF** connector

Treibersatz außen 150W - 48V DC
+ **ON/OFF**-Anschluss




Alimentatore incluso in remoto - Included Power Supply in remote - Fernspeisung enthalten

BV NE
□ ■



B48 MINIM Drivers Kit



KIT di ALIMENTAZIONE DIMMERABILI DALI(PUSH)

(kit dimmable DALI(push) driver - KIT Netzteile + DALI(Push) Dimmer)

9117MB48


Kit Driver "OUTSIDE" 150W 48VDC DIMMERABILE Dali(Push) + connettore // alimentatore e dimmer in remoto

Kit DIMMABLE Dali(Push) Driver OUTSIDE 150W 48VDC + connector // Remote Driver + Dimmer

Kit Driver DIMMERABILE Dali(Push) OUTSIDE 150W 48VDC + Stecker // Fernspeisung und Dimmer



Alimentatore incluso in remoto - Included Power Supply in remote - Fernspeisung enthalten



TRIAC



KIT di Alimentazione Dimmerabili Triac


(KIT Dimmable Triac Driver - KIT Dimmable Triac Driver)

9117NB48

Kit Driver "OUTSIDE" 100W 48VDC DIMMERABILE Triac + connettore // alimentatore in remoto

Kit DIMMABLE Triac Driver OUTSIDE 100W 48VDC + connector // Remote Driver

Kit Driver DIMMERABILE Triac OUTSIDE 100W 48VDC + Stecker // Fernspeisung



TRIAC



9117OB48

Kit Driver "OUTSIDE" 150W 48VDC DIMMERABILE Triac + connettore // alimentatore in remoto

Kit DIMMABLE Triac Driver OUTSIDE 150W 48VDC + connector // Remote Driver

Kit Driver DIMMERABILE Triac OUTSIDE 150W 48VDC + Stecker // Fernspeisung




Alimentatore incluso in remoto - Included Power Supply in remote - Fernspeisung enthalten






B48 MINIM Spot




T018B48

4W 380lm 48V DC




T018C48

7W 550lm 48V DC



T018D48

12W 850lm 48V DC




T018E48

18W 1280lm 48V DC



C02F


Servizio di accensione differenziata
Alternate Lighting Activation Service
Dienst für differenziertes Einschalten



24° Ottica - Optic - Optik

B 3000K



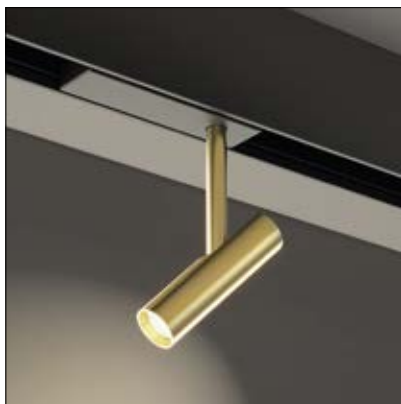


B48 MINIM Micro




T039C48

3W 360lm - 350mA - 48V DC



T039A48

3W 360lm - 350mA - 48V DC




T039B48

3W 360lm - 350mA - 48V DC



C02F

Servizio di accensione differenziata
Alternate Lighting Activation Service
Dienst für differenziertes Einschalten



24° Ottica - Optic - Optik

● B 3000K






B48 MINIM Flex



2,5 mt

T120A48


45W 3000lm - 48 VDC 3000K IP40 (2,5mt)
Connettore incluso
Connector included
Stromanschluss inklusive



5 mt

T120B48

90W 6000lm - 48 VDC 3000K IP40 (5mt)
Connettore incluso
Connector included
Stromanschluss inklusive



10 mt


T120C48

180W 12000lm - 48 VDC 3000K IP40 (10mt)
Connettore incluso
Connector included
Stromanschluss inklusive



C02F

Servizio di accensione differenziata
Alternate Lighting Activation Service
Dienst für differenziertes Einschalten



E2 Opale - Opal


● B 3000K

BV NE




B48 MYCRON



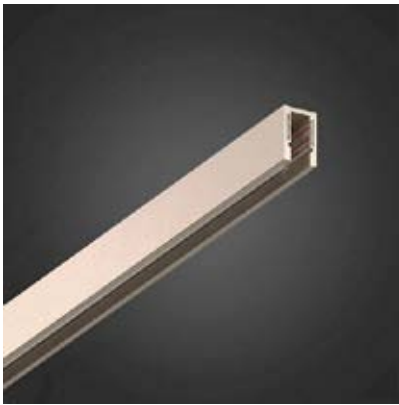

B48 MYCRON

Binario plafone
Ceiling track - Deckenleiste

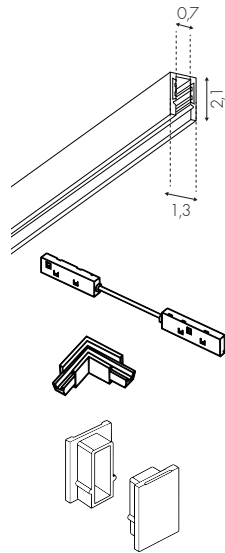

9140A

B48 MYCRON TRACK Plafone Sospensione L2mt 48V
B48 MYCRON TRACK Ceiling Suspension L2mt 48V
B48 MYCRON TRACK Deckenleuchte Hängeleuchte L2mt 48V

9140C

B48 MYCRON Angolo Plafone 48V
B48 MYCRON 48V Ceiling Corner
B48 MYCRON Deckenwinkel 48V

9140AT

B48 MYCRON Testa Plafone H 48V
B48 MYCRON Ceiling-mounted heads H 48V
B48 MYCRON Deckenleuchten H 48V




BV NE




B48 MYCRON

Accessori
Accessories - Zubehör




9140P

B48 MYCRON Giunto Lineare 48V
B48 MYCRON Linear Joint 48V
B48 MYCRON Linearkupplung 48 V



9140AS

B48 MYCRON Accessorio Sospensione 48V
B48 MYCRON 48V Ceiling Corner
B48 MYCRON Zubehör Aufhängung 48V



9140TA

B48 MYCRON Testa Plafone H 48V
B48 MYCRON Ceiling-mounted heads H 48V
B48 MYCRON Deckenleuchten H 48V




BV NE




B48 MYCRON

Kit alimentazione
Power supply kit - Stromversorgungsset



9140R

B48 MYCRON Alimentatore 100W 48V
B48 MYCRON Driver 100W 48V
B48 MYCRON Netzteil 100W 48V



9140S

B48 MYCRON Alimentatore 200W 48V
B48 MYCRON Driver 200W 48V
B48 MYCRON Netzteil 200W 48V




BV NE






B48 MYCRON

Binario incasso
Recessed track - Einbau-Schiene




9140A

B48 MYCRON TRACK Incasso Sosp L2mt 48V
B48 MYCRON TRACK Recessed Suspension L2mt 48V
B48 MYCRON TRACK Einbauleuchte Hängeleuchte L2mt 48V



9140M

B48 MYCRON Angolo Incasso 48V
B48 MYCRON Recessed Corner 48V
B48 MYCRON Einbauwinkel 48V



9140AT

B48 MYCRON Testa Plafone H 48V
B48 MYCRON Ceiling-mounted heads H 48V
B48 MYCRON Deckenleuchten H 48V




BV NE




B48 MYCRON

Accessori
Accessories - Zubehör



9140P

B48 MYCRON Giunto Lineare 48V
B48 MYCRON Linear joint 48V
B48 MYCRON Linearkupplung 48 V



9140TA

B48 MYCRON Testa Plafone H 48V
B48 MYCRON Ceiling-mounted heads H 48V
B48 MYCRON Deckenleuchten H 48V




BV NE




B48 MYCRON

Kit alimentazione
Power supply kit - Stromversorgungsset



9140R

B48 MYCRON Alimentatore 100W 48V
B48 MYCRON Driver 100W 48V
B48 MYCRON Netzteil 100W 48V



9140S

B48 MYCRON Alimentatore 200W 48V
B48 MYCRON Driver 200W 48V
B48 MYCRON Netzteil 200W 48V




BV NE






B48 MYCRON

Binario doppio updown
Double updown track - Up/Down-Stromschiene



9140H

B48 MYCRON TRACK2x Sospensione L2mt 48V
B48 MYCRON TRACK2x Suspension Light L2mt 48V
B48 MYCRON TRACK2x Pendelleuchte L2mt 48V




9140HT

B48 MYCRON Testa Plafone H 48V
B48 MYCRON Ceiling-mounted heads H 48V
B48 MYCRON Deckenleuchten H 48V




B48 MYCRON

Accessori
Accessories - Zubehör




9140P

B48 MYCRON Giunto Lineare 48V
B48 MYCRON Linear Joint 48V
B48 MYCRON Linearkupplung 48V



9140AS

B48 MYCRON Accessorio Sospensione 48V
B48 MYCRON 48V Ceiling Corner
B48 MYCRON Zubehör Aufhängung 48V




9140TA

B48 MYCRON Testa Plafone H 48V
B48 MYCRON Ceiling-mounted heads H 48V
B48 MYCRON Deckenleuchten H 48V




B48 MYCRON

Kit alimentazione
Power supply kit - Stromversorgungsset



9140R

B48 MYCRON Alimentatore 100W 48V
B48 MYCRON Driver 100W 48V
B48 MYCRON Netzeil 100W 48V




9140S

B48 MYCRON Alimentatore 200W 48V
B48 MYCRON Driver 200W 48V
B48 MYCRON Netzeil 200W 48V





B48 MYCRON Spotlight



9140S1


4W 400lm 48V



36° Ottica
Optic - Optik

B 3000K

BV NE



9140S2

6W 550lm 48V




36° Ottica
Optic - Optik

B 3000K

BV NE



B48 MYCRON Zoom



9140Z1

5W 450lm 48V




Zoom 10°/45°

B 3000K

BV NE



B48 MYCRON Move



9140M1

5.6W 580lm 48V




36° Ottica
Optic - Optik

B 3000K

BV NE




B48 MYCRON Lieve




9140L1

B48 MYCRON Lieve 30cm 6W 330lm 48V



9140L2

B48 MYCRON Lieve 60cm 10W 550lm 48V



9140L3

B48 MYCRON Lieve 90cm 15W 990lm 48V



E2 Opale - Opal




B 3000K

BV NE



B48 MYCRON Linea Dark



9140D1

B48 MYCRON Linea Dark 30cm 6W 390lm 48V



45° Ottica - Optic




B 3000K

BV NE BF PL



B48 MYCRON Pleni



9140P1

B48 MYCRON Pleni Ø 9,6 cm. 12W 1120lm 48V



E2 Opale - Opal




B 3000K

BV NE BF PL






B48 MYCRON Task




9140K1

B48 MYCRON Task 6.5W 570lm 48V



9140K2

B48 MYCRON Task 8W 730lm 48V



9140K3

48 MYCRON D



36° Ottica
Optic - Optik



B 3000K





via dell'Artigianato, 21
37066 Caselle di Sommacampagna - Verona (Italy)
Tel. +39 045 8581640
info@teamitaliailluminazione.it
teamitaliailluminazione.it

