

Mounting:	ceiling
Environment:	indoor
Typical use:	residential, hotels, restaurants, common areas, large spaces, meeting rooms, museums, offices, schools, shops

OPTIC

Lighting effects:	diffused down with E2 opal		
Light source:	down 3'600lm		
CCT:	2'700K (3'000K on request)		
Light source:	led SMD	C.R.I.>90	
Nominal life time:	50'000h	l80B20	(Ta 25°C)

ELECTRICAL DATA

Wattage:	down 83W
Voltage:	220VAC
Power supply:	on/off driver included inside the lamp

DIMENSIONS & WEIGHT


Dimensions: Ø65cm + Ø85cm Height 30cm Section H3x1,5cm

Ambient temperature range: -10 / +35°C

Materials: body: extruded aluminum
cover: pmma OPAL

Weight: 6 kg


3032ABOF

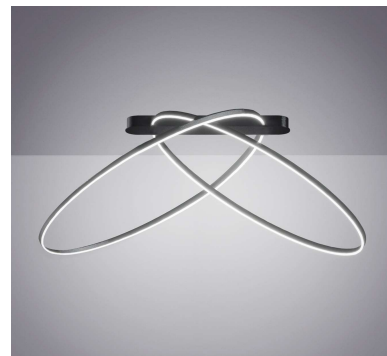

Leggera inclined ceiling Ø65cm+Ø82cm
designed by TI Lighting LAB

Inclined ceiling lamp with dimensions
Ø65cm + Ø82cm in painted aluminum.
DOWNLIGHT emission.


 NE Black

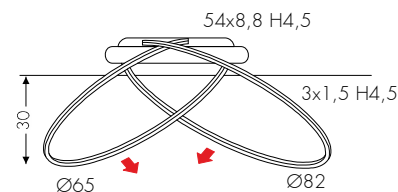

CERTIFICATIONS



LIGHT EMISSION

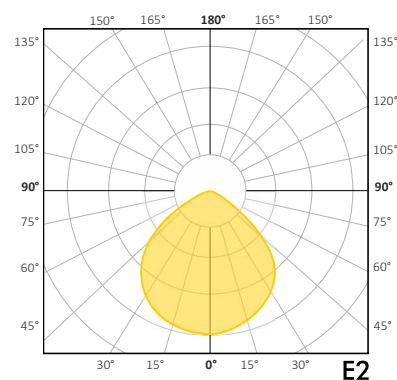

3032ABOF

OPTIONS





DIMMABLE DALI (Push)

Code:  3032ABDM

PHASE CUT

Code: 3032ABTF

STRUCTURE FINISHES


-  BV white
-  RV painted copper
-  BR painted bronze
-  OV painted gold



Leggera inclined ceiling Ø65cm+Ø82cm
designed by TI Lighting LAB

Inclined ceiling lamp with dimensions
Ø65cm + Ø82cm in painted aluminum.
DOWNLIGHT emission.

 NE Black

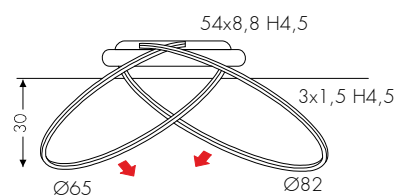

CERTIFICATIONS



LIGHT EMISSION

