

Mounting: stripLED
Environment: indoor
Typical use: residential, hotels, restaurants, common areas, large spaces, meeting rooms, museums, offices, schools, shops

OPTIC

Lighting effects: 120°
Light output: 1'900lm/mt (ref. to 3'000K) - 600lm/mt (RGB)
CCT: 2'700K / 3'000K / 4'000K +/-5%
Light source: SMD Led 2835 - 210LED/Mt - SMD Led 5050 - 160LED/Mt (RGB)
Nominal life time: 50'000h L80B20 (Ta 25°C)

ELECTRICAL DATA

Wattage: 14.4W/mt
Voltage: 24VDC
Power supply: not included

DIMENSIONS & WEIGHT

Dimensions: rolls: 5mt +/-0.5% pre-welded cable 20cm
 width: 10mm
 thickness: 1,8mm
 cutting unit: 33,3mm (100mm for RGB)


Ambient temperature range: -10 / +35°C

Materials: PCB Flexible White + 3M Biadhesive

CODES

Rev.A

9010141A
 9010141B
 9010141C
 9010141E

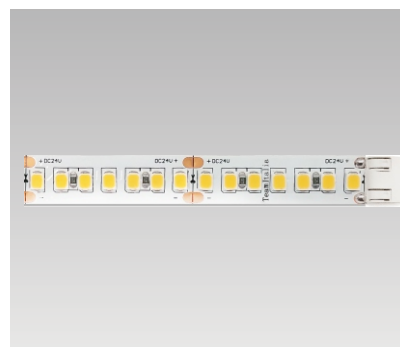

Striped 14,4W/mt
 designed by TI Lighting LAB

Careful selections of stripLEDs SMD2835 24VDC ideal for decorative application or for installations near the visual task, available also in IP65.
 Supplied in 5mt length rolls.

CERTIFICATE



LIGHT EMISSION

