

| | |
|--------------|---|
| Mounting: | stripLED |
| Environment: | outdoor |
| Typical use: | residential, hotels, restaurants, common areas, large spaces, meeting rooms, museums, offices, schools, shops |

OPTIC

| | |
|---------------------|--------------------------------|
| Lighting effects: | 120° |
| Light output: | 600lm/mt |
| CCT: | 2'700K / 3'000K / 4'000K +/-5% |
| Light source: | SMD Led 5050 - 160LED/Mt |
| Nominal life time : | 50'000h L80B20 (Ta 25°C) |

ELECTRICAL DATA


| | |
|---------------|--------------|
| Wattage: | 14.4W/mt |
| Voltage: | 24VDC |
| Power supply: | not included |

DIMENSIONS & WEIGHT

| | |
|-------------|--|
| Dimensions: | rolls: 5mt +/-0.5% pre-welded cable 20cm |
| | width: 10mm |
| | thickness: 1,8mm |
| | cutting unit: 100mm |

Ambient temperature range: -10 / +35°C

Materials: PCB Flexible White + 3M Biadhesive

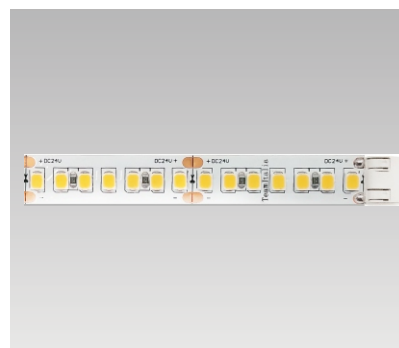

Striped 14,4W/mt
designed by TI Lighting LAB

Careful selections of stripLEDs SMD2835 24VDC ideal for decorative application or for installations near the visual task, available also in IP65.
Supplied in 5mt length rolls.

CERTIFICATE



LIGHT EMISSION

